


**Technical features**

Item Id	EP-015511
drive turning direction	R.H./L.H.
drive speed max.	interval operation 12.000 rpm
number of spindles	1
spindle position	vertical - tool receptacles upwards
tool receptacle	ø16H7 x 32 mm
gear ratio	1 : 1 – tooth belt drive
turning direction of tool receptacle	opposite to drive turning direction
spindle speed max.	interval operation 12.000 rpm
drive capacity	3,0 kW
weight without drive adapter	approx. 1,85 kg

**Optional accessories:**

- Hex-wrench SW3 Item Id. 138030
- Open end spanner SW32 Item Id. 131003

The underfloor drilling aggregate G200 is due to its design conceived for drilling the bottom side of workpieces. The spindle turning direction of the tool receptacle is opposite to the driving direction. The drive speed is transferred in a ratio of 1:1 to the tool receptacle. The maximum spindle speed is 12,000 rpm in interval operation. The dimensions are variable and can be created on almost any size you want.

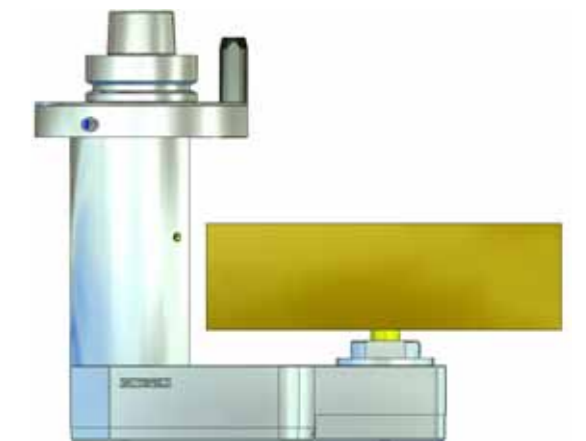

**Variants on demand!**